


zeparo

Separator Heating and cooling water systems

Zeparo Kombi ZUK

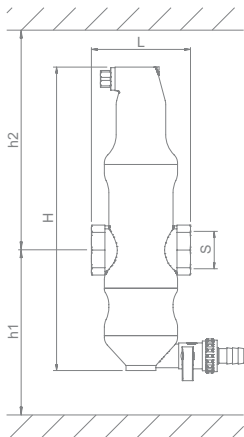


Separator for micro bubbles, sludge particles

- helistill separator
- leakfree air vent
- excentric tangential de-sludging valve
- Universal type, brass
- addition of antifreeze up to 50%
- horizontal installation, female thread or compression fitting

PS: 10 bar TS: 110 °C

Type	H mm	h1 mm	h2 mm	L mm	G kg	S	VD m ³ /h	DP _{VD} bar	Article-Nº
ZUK 20	267	158	171	88	1.7	G 3/4	1.25	0.017	789 4120
ZUK 22	267	158	171	88	1.7	22 mm	1.25	0.017	789 4122
ZUK 25	270	148	181	88	1.7	G 1	2	0.013	789 4125
ZUK 32	302	163	196	88	2	G 1 1/4	3.7	0.014	789 4132
ZUK 40	336	168	226	88	2.1	G 1 1/2	5	0.014	789 4140

Zeparo Kombi Magnet ZUKM

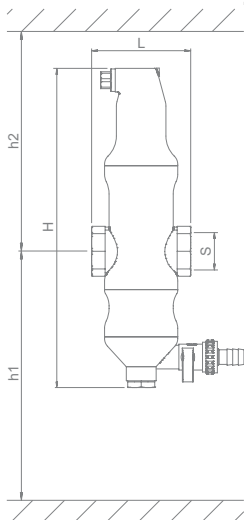

Separator for micro bubbles, sludge particles, with magnetic action

- helistill separator
- leakfree air vent
- excentric tangential de-sludging valve
- dry magnetic rod in pocket to increase the magnetite capture
- Universal type, brass
- addition of antifreeze up to 50%
- horizontal installation, female thread or compression fitting

PS: 10 bar TS: 110 °C

Type	H mm	h1 mm	h2 mm	L mm	G kg	S	VD m ³ /h	DP _{VD} bar	Article-Nº
ZUKM 20	281	232	171	88	2	G 3/4	1.25	0.017	789 4220
ZUKM 22	281	232	171	88	2	22 mm	1.25	0.017	789 4222
ZUKM 25	284	222	181	88	2,1	G 1	2	0.013	789 4225
ZUKM 32	316	237	196	88	2,3	G 1 1/4	3.7	0.014	789 4232
ZUKM 40	350	242	226	88	2,5	G 1 1/2	5	0.014	789 4240